
 <b>REMO-HSE</b>	<b>HVC 100M-04</b> <b>Art.-Nr. 2432001</b>	<b>Datasheet</b>
	<b>High Voltage Cable</b>	

**Description:** Unshielded high voltage cable for 100 kV DC for use in electrostatic applications, e.g. liquid paint, powder coating and flocking systems.  
**Field of application:** Electrostatic applications according to EN 50176 / EN 50177  
**Installation information:** Accessory: multilam plug 4 mm

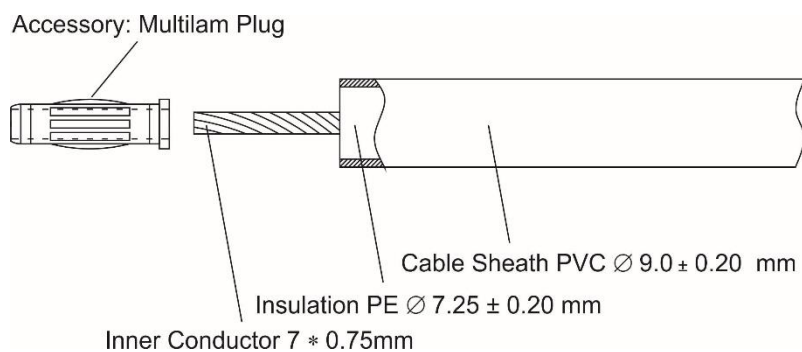

### Technical Specifications:

<b>HV-Cable</b>	
Rated Voltage:	100 kV DC
Test Voltage:	120 kV DC acc. to EN 50176/EN 50177
Inner Conductor:	7 × 0.75 mm CU-bare
Insulation:	PE
Cable Sheath:	PVC black
Outer Diameter:	9.0 mm
Bending Radius:	> 15 times outer diameter
Operating Temperature:	-20 to +70°C

Date: 2020-01-15	REMO-HSE Hochspannungselektronik GmbH, Straubinger Str. 28, D - 94372 Rattiszell Tel.: +49 (0) 9964 / 6406 - 0 * Fax: +49 (0) 9964 / 6406 - 20 * Email: info@remo-hse.de	Page 1 / 1
---------------------	---	---------------